Miniature Thermocouple Connectors



Description


Miniature thermocouple connectors for the termination of flexible, stranded or solid wires and mineral insulated cable.

Features


- High quality glass filled thermoplastic, single body design
- Polarised pins to reduce connection uncertainties
- Short circuit prevention
- Sandwich construction connects and secures lead wires
- Stainless Steel screws
- Standard IEC colours (ANSI available on request)

Application

- Accepts wires up to 0.6mm with a maximum cable diameter of 4.5mm
- Temperature rating 200°C Max.
- Available for use with thermocouple types K, T, J, N, R/S, E or U





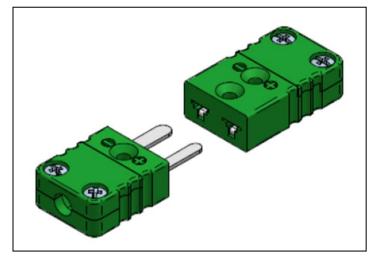

Specification

Product	Miniature Thermocouple Connectors
Туре	Type K, T, J, N, R/S, E or U
Max. Temp	200°C
Wire Ø	Up to 0.6mm
Cable Ø	Up to 4.5mm
Colour	Standard IEC Colours
Pins	Original thermocouple material



For more information visit:

sterlingsensors.co.uk



Sterling Sensors UK Ltd Fitmec Works : Hawksley Street : Oldham

United Kingdom : OL8 4PQ