

Standard Thermocouple Connectors



Description

Standard Thermocouple Connectors for the termination of flexible, stranded or solid wires and mineral insulated cable.



Available in thermocouple types K, T, J, N, R/S, E or U

Features

- High quality glass filled thermoplastic body
- Available with solid or hollow pins in original thermocouple material
- Polarised pins to reduce connection uncertainties
- Short circuit prevention
- Sandwich construction connects and secures lead wires
- Stainless Steel screws
- Standard IEC colours (ANSI available on request)

Compatibility

- Accepts wires up to 2.0mm with a maximum cable diameter of 8.0mm
- Temperature rating 200°C Max.
- Available for use with thermocouple types K, T, J, N, R/S, E or U

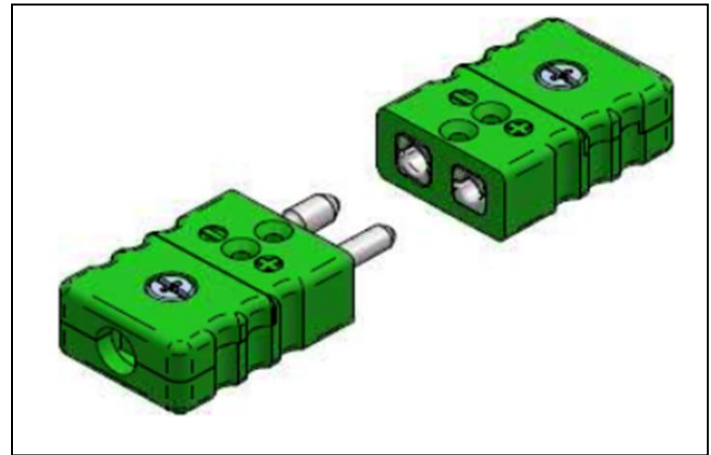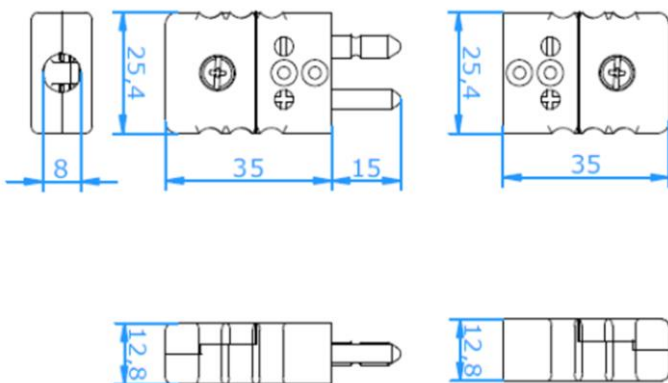

Specification

Product	Standard Thermocouple Connectors
Type	Type K, T, J, N, R/S, E or U
Max. Temp	200°C
Wire Ø	Up to 2.0mm
Cable Ø	Up to 8.0mm
Colour	IEC-584-3
Pins	Original thermocouple material Available with hollow or solid pins
Part Number	CCSTC

Take advantage of our bulk buy discounts.

Order 10 or more items to qualify.



For more information visit:

sterlingsensors.co.uk



Sterling Sensors UK Ltd

Fitmec Works :: Hawksley Street :: Oldham
United Kingdom :: OL8 4PQ

T: +44 (0) 161 620 0410 F: +44 (0) 161 627 0507 E: sales@sterlingsensors.co.uk W: sterlingsensors.co.uk