

Mineral Insulated RTD with Pot Seal




Made in the UK 

Description

Mineral Insulated RTD (Pt100) with Plain Pot Seal and 1 metre lead wire

Pt100 resistance thermometers manufactured from mineral insulated cable are suitable for use up to temperatures of 600°C. The RTD is supplied in 3 or 6mm diameter and is terminated using a plain pot seal, epoxy resin filled with one metre FEP/FEP stranded 4 wire connection. Although shown straight, mineral insulated resistance thermometers can be bent around formers (with a radius of three times the probe diameter) and at angles and shapes to suit the application. They can also be manufactured in very long lengths.

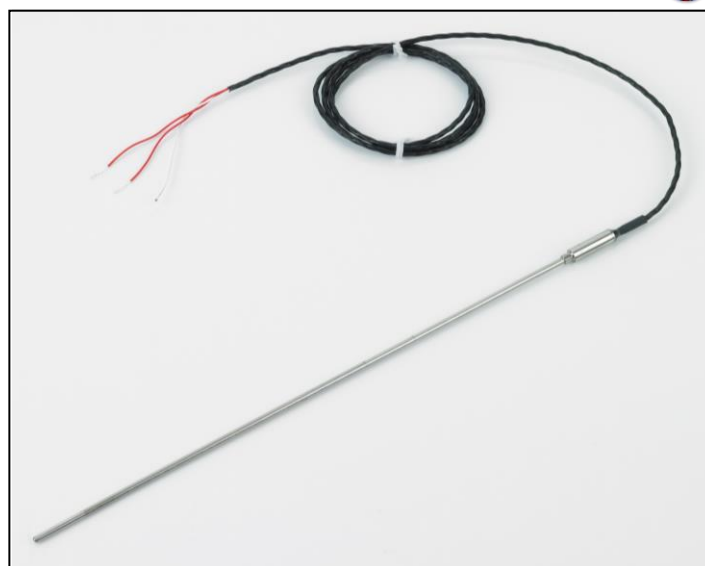

Features

- Mineral insulated cable
- Wide temperature range
- Can be formed and shaped to fit the process
- 1 metre FEP/FEP 4 wire stripped leads
- Can be made in long lengths

Application

- Aerospace
- Manufacturing processes
- Pharmaceutical and laboratory

Specification

Product	Mineral Insulated RTD with Pot Seal
Type	Pt100
Temp Range	-100 to 600 °C
Diameter	3.0mm or 6.0mm
Probe Length	150, 250 & 500mm, 1m, 1.5m, 2m & 3m standard or to order
Material	316 stainless steel sheath
Accuracy	Class A
Connection	4 wire
Termination	1 metre FEP/FEP stranded lead wire
Part Number	RMPTI

We calibrate
sensors up to
1100°C

Visit our calibration
page to find out more



For more information visit:

sterlingsensors.co.uk