

Hermetically Sealed RTD, Pt100 & Pt1000



Made in the UK 

Description


Hermetically sealed IP67 wire RTD sensor for corrosive or wet environments.

This flexible multi-use sensor has been designed specifically to provide protection from corrosion in harsh or wet environments. It has a fast response time and can be easily wiped clean.

The impermeable FEP insulated RTD (Pt100 or Pt1000) has excellent resistance to chemicals and oils including fluids and gases.

The RTD element is housed in the wire tip and weld-sealed providing an air and moisture proof environment.

The versatility of this sensor makes it suitable for a wide range of applications shown below.

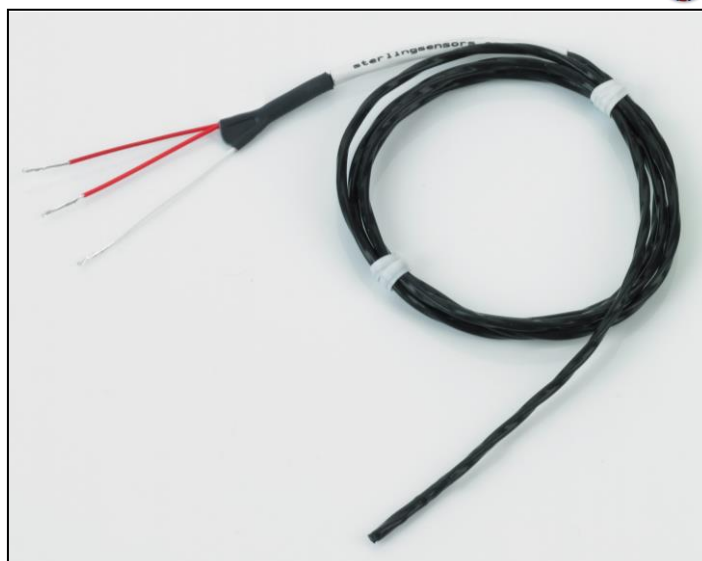

Specification

Product	Hermetically Sealed RTD
Type	Pt100 or Pt1000 RTD
Temp Range	-50 to +250 °C
Length	1 to 5 metre, or to order
Accuracy	Class A
Diameter	2.6mm nominal
Junction	Insulated
Material	7/0.2mm FEP insulated
IP Rating	IP67
Termination	Stripped tails, mini plug or to order

Features

- Fast response
- Can be immersed in corrosive liquids
- Available in Pt100 or Pt1000 RTD types
- Easy to wipe clean

Application

- Refrigeration, Laboratory, Geothermal
- Food and Drink
- Pharmaceutical, Autoclaves and Sterilisation

Looking for something different?

Visit our custom made sensors page and have your sensors your way.



For more information visit:

sterlingsensors.co.uk



Sterling Sensors Ltd

Fitmec Works :: Hawksley Street :: Oldham
United Kingdom :: OL8 4PQ

T: +44 (0) 161 620 0410 F: +44 (0) 161 627 0507 E: sales@sterlingsensors.co.uk W: sterlingsensors.co.uk