



 **STERLING SENSORS**
TEMPERATURE SENSING TECHNOLOGY

HAND HELD SENSORS & PROBES

Supplied bespoke for applications ranging from food and beverage to cold storage - in standard thermocouple types K, J and T, with specials available.

Sterling Sensors can also supply hand held probes as PT100, PT1000 and various forms of thermistors.

Next day delivery is available on a selection of insertion, penetration and surface hand held sensors.

We also manufacture semi-flexible mineral insulated hand held sensors for high temperature applications.

A range of digital thermometers are available to complement these products.





POCKETS & THERMOWELLS

Sterling Sensors manufacture a range of pockets and thermowells, both fabricated and solid drilled.


We offer a variety of process connections, including screwed parallel or taper, flanged ANSI or BS EN 1092 for more heavy duty applications, or alternatively we can produce a range of hygienic fittings.

Forged and refractory thermowells can be manufactured for high pressure and high temperature applications.

RESISTANCE TEMPERATURE DETECTORS

All of our RTDs are manufactured in accordance with IEC751 to Class A, B, 1/3 DIN, 1/5 DIN and 1/10 DIN.

RTD elements are stocked as PT100 and PT1000, both flat film and wire wound. A range of PTC and NTC thermistors are also available.

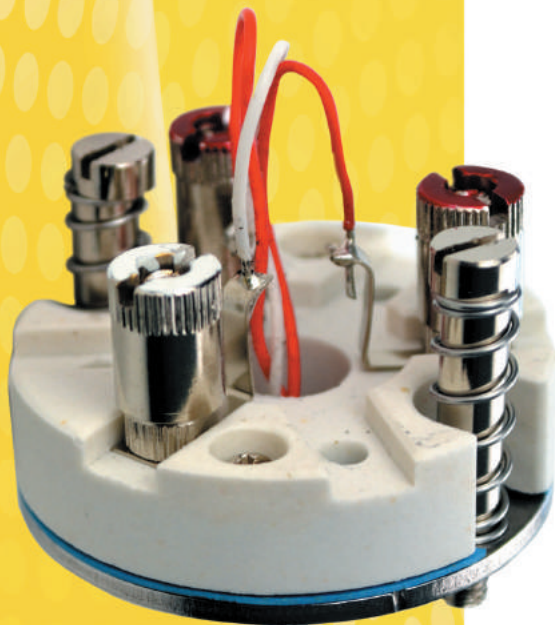

Comprehensive stocks of stainless steel tube, MI cable, terminal heads, blocks, fittings and other accessories are all held to ensure we can meet all specifications.

Sterling Sensors have the capability to manufacture terminal head assemblies with transmitters suitable for ATEX applications.

THERMOCOUPLES

Available in types B, E, J, K, N, R, S and T in accordance with IEC584-3 using only Class 1 materials.

From a basic bare wire sensor to a more complex Type R assembly (for high temperature applications), Sterling Sensors can satisfy all of your requirements.

Terminal heads, blocks, cables, connectors and fittings, in varying sizes and materials, are available to supplement our range of thermocouples.



CALIBRATION

Our state-of-the-art laboratory enables us to calibrate not just the products that we manufacture but a wide range of other temperature sensors.

Stirred water and oil, fluidised bed and solid block calibrations are carried out in-house.

All calibrated sensors are supplied with a UKAS traceable certificate.

CABLES & ACCESSORIES

Selecting the right cable is a critical detail in the design and manufacture of temperature sensors.























Cables for both RTDs and thermocouples are available in many material types, including PVC, silicone, FEP, PFA, PTFE, fibreglass and HT fibreglass.

Sterling Sensors stock thermocouple and copper connectors in both standard and miniature sizes, as line plugs or sockets, panel sockets or for use as part of a temperature sensor.

Compression fittings in stainless steel or brass are available with BSPP, BSPT or NPT threads.



THERMOCOUPLE INFORMATION

T/C TYPE	CONDUCTOR		T/C JUNCTION CONTINUOUS TEMPERATURE RANGE °C							CABLE CODE
	+	-		INTERNATIONAL IEC 584-3:1989 BS 4937 Pt30:1993	(FORMER) UNITED KINGDOM BS 1843:1952	FRANCE NFE-18001	GERMANY DIN43714	JAPAN JIS C 1610-1981	USA ANSI MC 96.1	
B	PT-30Rh	PT-6Rh	+100 to +1600							BX
E	Ni-Cr	Cu-Ni Constantan	0 to +800							EX
J	Fe	Cu-Ni Constantan	+20 to +700							JX
K	Ni-Cr	Ni-Al	0 to +1100							KX
N	Ni-Cr-Si Nicrosil	Ni-Si-Mg Nisil	0 to +1100							NX NC
R	PT-13Rh	Pt	0 to +1600							RCA
S	PT-10Rh	Pt	0 to +1550							SCA
T	Cu	Cu-Ni Constantan	-185 to +300							TX
U	Cu	Cu-Ni Constantan	Compensating Cable for Types R and S 0 to +50							RCA SCA
V _x	Cu	Cu-Ni	Compensating Cable for Type K 0 to +90							KCB
W	W	W-26Re	+20 to +2300		NO STANDARD (USE USA)					
W ₃	W-3Re	W-25Re	+20 to +2000		NO STANDARD (USE USA)					
W ₅	W-5Re	W-26Re	+20 to +2300		NO STANDARD (USE USA)					
T/C TYPE	+	-	T/C JUNCTION CONTINUOUS TEMPERATURE RANGE °C							CABLE CODE
	CONDUCTOR		°C							

OUR ENVIRONMENTAL POLICY

Sterling Sensors Ltd
is committed to reducing its impact on the environment.
This shortform brochure is one of a series of measures
undertaken to reduce our carbon footprint.



Sterling Sensors Ltd Fitmec Works
Hawksley Street Oldham OL8 4PQ UK

Tel: +44 (0)161 620 0410
Fax: +44 (0)161 627 0507
Email: sales@sterlingsensors.co.uk

www.sterlingsensors.co.uk

