
PFA Exposed Junction Thermocouple







Description

Fine wire twisted pair thermocouple with exposed tip for fast response in measurement and control applications.


These flexible, low cost thermocouples available as type K,T, J or N thermocouples with an exposed junction for fast response and PFA insulation which provides protection and insulation.

Features

- 0.3mm Ø conductor with low thermal mass
- Flexible
- Exposed junction
- Custom lengths available
- Made from Class 1 material

Application

- Test and Measurement
- Temperature mapping
- Low temperature

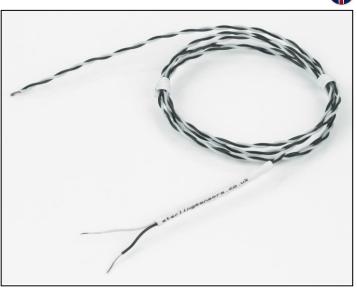

Specification

Product	PFA Exposed Junction Thermocouple
Type	K,T, J or N
Temp Range	-75 to +250 °C
Length 1	1, 2 and 5 metres or to order
Diameter	1.6 x 1.3 nominal
Junction	Exposed
Material	1/0.3mm PFA insulated
Termination	Stripped tails, mini or standard plug
Part Number	TWEJUP



For more information visit:

www.sterlingsensors.co.uk



Sterling Sensors UK Ltd

Fitmec Works : Hawksley Street : Oldham

United Kingdom : OL8 4PQ